
specifications centau **BC180-CS** from SKOPE Centaur Six Drawer Under Counter Chiller CABINET DIMENSIONS Type: BC180-CS-6RROS-E External Internal Height: 840mm 610mm 1800 Width: 1800mm 1450mm 25 പ് Depth: 725mm* 530mm Heavy duty 1.3m² Floor area: stainless steel * Depth of 725mm includes 25mm rear spacer worktop -200 292 Removable swing service door 1/1 567 1/11/1 1/1 Refrigerated stainless steel drawers (suitable for 150mm deep gastronorm containers, not included)

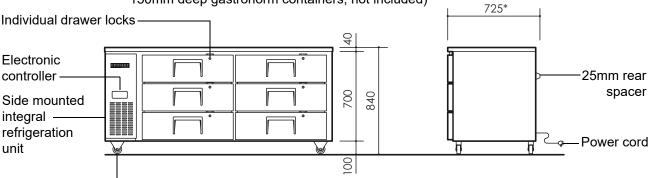

Swivel castors (front locking) or four adjustable legs (100-160mm)

Copyright © 2012 SKOPE Industries Limited

CABINET SPECIFICATIONS	
Refrigeration system:	Side mounted, integral refrigeration system
Electronic controller:	CAREL 'easy' electronic controller
Refrigerant:	R134a / 290g
Nominal compressor capacity:	315 Watts
Cabinet internal volume:	469 litres
Climatic Class:	5
Operating temperature:	+1°C to +4°C up to 38°C ambient
Electrical:	230-240 Volts a.c. 50 Hz, Chiller: 2.38 Amps
Internal lighting:	n.a.
Power cord:	2m flexible power cord with 3-pin plug
Drawers:	Six refrigerated stainless steel drawers with individual key locks
Weight:	168 kg

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0299 Rev. 5.1 May 2016



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533 Email: enquiry@skope.co.nz Website: www.skope.co.nz