specifications




BB580r-3SL

SKOPE Backbar


Electronic Controller

3 Sliding Door Remote Chiller (RB2003V)



CABINET DIMENSIONS		
	External	Internal
Height:	920mm*	758mm
Width:	1915mm	1580mm
Depth:	596mm	530mm
Floor area:	1.14m ²	

* Height excludes castors, legs or optional worktop.

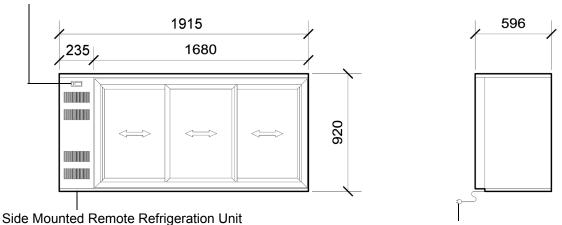

Power Cord with 3-Pin Plug

Copyright © 2008 SKOPE Industries Limited

CABINET SPECIFICATIONS		
Refrigeration system:	Electronic controlled, side mounted, remote refrigeration unit	
Refrigerant:	Thermostatic expansion valve fitted as standard to suit R134a or R404A	
Pipe connection size:	Liquid line: 1/4". Suction line: 3/8"	
Remote refrigeration duty:	638 Watts	
Cabinet internal volume:	580 litres	
Insulation:	50mm thick, high density cyclo-isopentane polyurethane foam	
Cabinet temperature range:	+1°C to +4°C up to 32°C ambient	
Drainage:	Evaporator drain fitted inside service compartment (requires plumbing)	
Electrical:	230-240 Volts a.c. 50 Hz, 1.5 Amps	
Internal lighting:	1 x 24W T8 Frosted LED Tube (Ø26 x 1500mm, 5500K) - Switched	
Internal door opening size:	3 door openings: 720mm high x 470mm wide	
Doors:	Self-closing, double glazed toughened single Low-E safety glass sliding doors	
Worktop (optional):	Optional 25mm stainless steel worktop	
Shelves:	Two adjustable shelves per door: 495/555mm wide x 440mm deep	
Weight:	160 kg	

SKOPE Industries Limited reserve the right to alter specifications without notice.

PSS0210 Rev. 2.1 Apr. 2016



SKOPE INDUSTRIES LIMITED

New Zealand Freephone: 0800 947 5673, Fax: (03) 983 3896. Australian Freephone: 1800 121 535, Freefax: 1800 121 533 Email: enquiry@skope.co.nz Website: www.skope.com